leobog

Powered by AULA

Hi75C PRO USER MANUAL

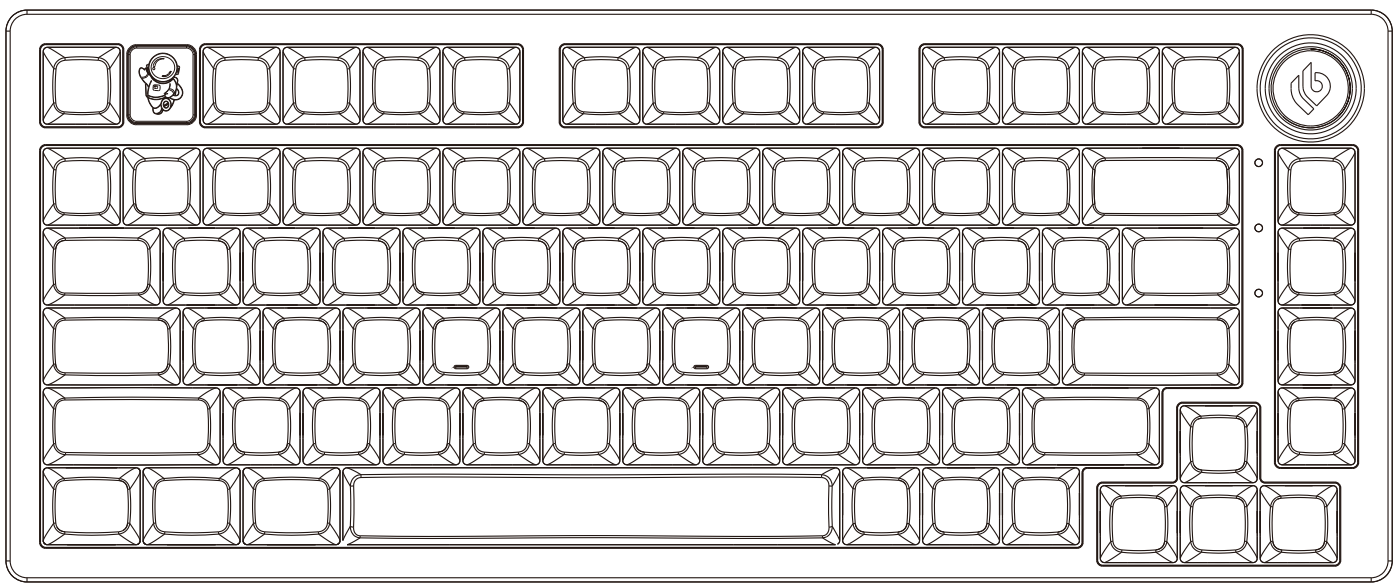

User Manual
English

Hi75C PRO Custom Mechanical Keyboard
RGB Version

Product Features

- Stylish exterior design, 75% keyboard, aluminum top and bottom cover, gasket structure, delicate and soft touch.
- Keycaps and mechanical switches can be plugged in and unplugged, and users can also purchase switches and personalized keycaps from various brands on the market for DIY.
- The keyboard material is solid and the key response is sensitive.
- Built in 4000mAh capacity lithium battery for cyclic charging, environmentally friendly and energy-saving, effectively extending battery life.
- Equipped with a multimedia multifunctional knob, it can switch between office and game modes conveniently and quickly.
- FN+\ | combination key and scroll wheel key switch 16 RGB lighting effects and turn off a total of 17 lighting effects: (drifting with the flow, following like a shadow, positive dazzling light waves, rotating windmill, rainbow waterfall, blooming wealth, game mode, off, always on, breathing, dreamy rainbow, ready to explode, strolling in the rain, rainbow wheel, button ripples, starry spots, continuous flow).
  In conjunction with the driver's music rhythm RGB lighting effect, there are 10 lighting modes to choose from under this lighting effect.
- The wired mode and 2.4G mode are combined to drive each key with custom functions and macro definitions. The driver can customize over 16 million colors.
- Humanized keyboard design, combined with Fn to add a series of commonly used shortcut function keys.
- Under BT /2.4G mode, if there is no operation for one minute, it will automati-cally enter power-saving mode. Click the button to wake up the keyboard.
- Checking keyboard battery level and connecting Bluetooth can display on the computer.
- Cooperate with the driver to adjust the keyboard response speed to 5 levels.
- Cooperate with the driver to add 3 more layers of customization functions on top of the general customization functions: support dual FN layer editable, achieve single key dual combination function, add TAP layer for one key dual-use, a total of 4 layers of customization functions.
- Both keyboard BT /2.4G/wired support full key no collision.
- Keyboard return rate: wired mode 1000Hz, 2.4G mode 1000Hz, BT mode 125Hz.
- USB-C connectivity is more reliable and performance is more stable.

Product Specification

- Key: 81 keys
- Product size: 329.5×136×44.3±0.2mm
- Product weight: Approx. 1236g(Excluding wires)
- Rated voltage/current: DC3.7V ⎓ 200mA
- Charging voltage/current: DC 5V/≤1250mA, charging about 6 hours.
  Battery life: about 20 hours (default light effect)/about 333 hours (all lights off)

Standard Shortcut Description

FN+	ESC	·~	1	2	3	Q	W
Function	Restore default	2.4G alignment	BT 1#	BT 2#	BT 3#	Android	Windows
FN+	E	R	| \	TAB	↑	↓	←
Function	Mac	IOS	Light mode switching	Color switching	Brightness +	Brightness -	Speed-
FN+	→	WIN-L	U	I	O	Del	End
Function	Speed+	Lock WIN	Prtsc	Scrlk	Pause	Ins	Home
FN+	Back						
Function	Switch roller light						

1. FN+Q=Android (the Q key blinks red for 3s). The single press function in F area is combined with FN in F area

KEY	F1	F2	F3	F4	F5	F6	F7	F8
Single pressing	Screen brightness -	Screen brightness +	Conversion window	Back to desktop	Brightness -	Brightness +	Previous	Play/pause
Function	F1	F2	F3	F4	F5	F6	F7	F8
KEY	F9	F10	F11	F12				
Single pressing	Next	Mute	Volume -	Volume +				
Function	F9	F10	F11	F12				

2. FN+W=Windows (W key blinking red for 3s), the single press function in F area is combined with FN in F area

KEY	F1	F2	F3	F4	F5	F6	F7	F8
Single pressing	F1	F2	F3	F4	F5	F6	F7	F8
Function	Home page	E-mail	Conversion window	Open the Explorer	Brightness -	Brightness +	Previous	Play/pause
KEY	F9	F10	F11	F12				
Single pressing	F9	F10	F11	F12				
Function	Next	Mute	Volume -	Volume +				

3. FN+E=Mac system (the E key blinks red for 3s). The single press function in F area is combined with FN in F area

KEY	F1	F2	F3	F4	F5	F6	F7	F8
Single pressing	Screen brightness -	Screen brightness +	Conversion window	Back to desktop	Brightness -	Brightness +	Previous	Play/pause
Function	F1	F2	F3	F4	F5	F6	F7	F8
KEY	F9	F10	F11	F12				
Single pressing	Next	Mute	Volume -	Volume +				
Function	F9	F10	F11	F12				

4. FN+R=IOS system (R key blinking red for 3s), the single press function in F area and the FN function in F area are combined

KEY	F1	F2	F3	F4	F5	F6	F7	F8
Single pressing	Screen brightness -	Screen brightness +		Back to desktop	Brightness -	Brightness +	Previous	Play/pause
Function	F1	F2	F3	F4	F5	F6	F7	F8
KEY	F9	F10	F11	F12				
Single pressing	Next	Mute	Volume -	Volume +				
Function	F9	F10	F11	F12				

Function Description

- The switch must be switched to the corresponding mode FN+`~/1/2/3 in order to long press the code.
- Turn the switch to 2.4G mode, then press and hold the FN+key for 3 seconds. The green light will flash slowly and enter the pairing mode,
- At this point, the receiver is inserted to complete the code matching. The blue light on the `~key lights up for 2 seconds, indicating a successful 2.4G connection.
- Switch to BT mode BLE5.0/BLE3.0 (device name Hi75C PRO 5.0 KB/Hi75C PRO 3.0 KB) and randomly broadcast according to the BT version of the terminal device, which can connect up to 3 devices.
- FN+1=When the BT 1 button is pressed and the blue indicator channel broadcasts, the blue light flashes rapidly, and the blue light stays on for 3 seconds when reconnecting/connecting.
- FN+2=When the blue indicator channel broadcasts under the BT 2 button, the blue light flashes rapidly, and the blue light stays on for 3 seconds when reconnect-ing/connecting.
- FN+3=When the blue indicator channel broadcasts under the BT 3 button, the blue light flashes rapidly, and the blue light stays on for 3 seconds when reconnect-ing/connecting.
- FN+Esc press for three seconds=restore default.
- Fn+TAB=Switch light effect color.
- Fn+left WIN=lock/open left WIN window key (when locking WIN in WIN system, the white light under the lock WIN key stays on, Android/MAC does not lock WIN).
- Switch to Mac system and swap the position of left WIN/left ALT (without locking WIN).
- Switch to Mac system and switch button positions (without locking WIN as shown in the table below):

Win/Android	Lelf Win	Lelf Alt	Right Alt
Mac	Lelf Option	Lelf Command	Right Command

- After holding down FN, it will prompt that the current 3 mode, BT 3 channel, and 3 system corresponding buttons are all lit with white lights. Release to restore the light effect.
- Keyboard patching requires switching to wired mode, and after flashing, re plug and unplug the keyboard cable and toggle switch to switch on and off again.

Multimedia knob function

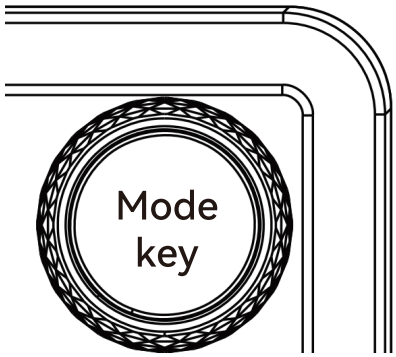

- Press and hold the Mode key to switch modes
- Game mode (Knob indicator breathing)
- Office mode (knob indicator is on)
- FN+ESC restores factory default lighting

	Game mode	Office mode
Pilot lamp	Breath	Steady on
Short press	17 kinds of light effects can be switched	Sound off
Knob clockwise	Light brightness +	Volume +
Knob counterclockwise	Light brightness -	Volume -

Listallation And Use Instructions

Computer system requirements:

- Wired /2.4G mode: Windows ALL operating system WIN XP, WIN7, WIN8, WIN10 (in Win95, Win98 systems, drivers may be required).
- Wired mode /2.4G receiver: equipped with a USB 1.1 or higher port.
- BT mode "device name: LEOBOG Hi75C Pro 3.0" WIN7 and below systems.
- BT mode "device name: LEOBOG Hi75C Pro 5.0" WIN8, WIN10 and above systems.
- BT mode: MAC computers, Android phones or tablets, IOS phones or tablets with BT BT3.0, BLE4.0, BLE5.0 and above hardware.

Hardware connection:

- The wired USB/2.4G receiver supports hot swap (plug and play).

- Note:
  Product, technology in the continuous production process of continuous optimization, specification may not reach theproduction products to keep abreast of the update, please understand.

EN

Product Specifications

- Product Specification
- Key: 81 keys
- Product size: 329.5×136×44.3±0.2mm
- Product weight: Approx. 1236g(Excluding wires)
- Rated voltage/current: DC3.7V /≤ 200mA
- Charging voltage/current: DC 5V/s1250mA, charging about 6 hours.
- Battery life: about 20 hours (default light effect)/about 333 hours (all lights off)

KR

제품 사양

- 제품 사양
- 키: 81키
- 제품 크기: 329.5×136×44.3±0.2mm
- 제품 무게: 약 1236g(케이블 제외)
- 정격 전압/전류: DC3.7V /≤ 200mA
- 충전 전압/전류: DC 5V/1250mA, 충전 약 6시간
- 배터리 수명: 약 20시간(기본 조명 효과)/약 333시간(조명 완전 꺼짐)

PT Especificação do produto

• Especificações do Produto
• Teclas: 81 teclas
T• amanho do produto: 329.5×136×44.3±0.2mm
• Peso do produto: Aprox. 1236g (sem fios)
• Tensão/corrente nominal: DC3.7V /≤ 200mA
• Tensão/corrente de carregamento: DC 5V/1250mA, carregamento cerca de 6 horas
• Autonomia da bateria: cerca de 20 horas (efeito de luz padrão)/cerca de 333 horas (luzes totalmente desligadas)

ES Especificación del producto

• Especificaciones del Producto
• Teclas: 81 teclas
• Tamaño del producto: 329.5×136×44.3±0.2mm
• Peso del producto: Aprox. 1236g (sin cables)
• Tensión/corriente nominal: DC3.7V /≤ 200mA
T• ensión/corriente de carga: DC 5V/1250mA, carga aprox. 6 horas
• Duración de la batería: aprox. 20 horas (efecto de luz predeterminado)/aprox. 333 horas (luces totalmente apagadas)

DE Produktspezifikation

• Produktspezifikation
• Tasten: 81 Tasten
• Produktgröße: 329.5×136×44.3±0.2mm
• Produktgewicht: Ca. 1236g (ohne Kabel)
• Nennspannung/Strom: DC3.7V /≤ 200mA
• Ladespannung/Strom: DC 5V/1250mA, Ladezeit ca. 6 Stunden
• Batterielebensdauer: Ca. 20 Stunden (Standardbeleuchtung)/ca. 333 Stunden (Beleuchtung komplett aus)

IT Specifiche del prodotto

• Specifiche del Prodotto
• Tasti: 81 tasti
• Dimensioni del prodotto: 329.5×136×44.3±0.2mm
• Peso del prodotto: Circa 1236g (senza cavi)
• Tensione/corrente nominale: DC3.7V /≤ 200mA
• Tensione/corrente di ricarica: DC 5V/1250mA, ricarica circa 6 ore
• Autonomia della batteria: circa 20 ore (effetto luce predefinito)/circa 333 ore (luci completamente spente)

RU

Спецификация продукта

• Характеристики продукта
• Клавиши: 81 клавиша
• Размеры продукта: 329.5×136×44.3±0.2mm
• Вес продукта: Прибл. 1236г (без проводов)
• Номинальное напряжение/ток: DC3.7V /≤ 200мА
• Напряжение/ток зарядки: DC 5V/1250мА, зарядка около 6 часов
• Срок службы батареи: около 20 часов (эффект освещения по умолчанию)/около 333 часов (все огни выключены)

TH

ข้อมูลจำเพาะผลิตภัณฑ์

• รายละเอียดสินค้า
• จำนวนปุ่ม: 81 ปุ่ม
• ขนาดสินค้า: 329.5×136×44.3±0.2mm
• น้ำหนักสินค้า: ประมาณ 1236g (ไม่รวมสาย)
• แรงดัน/กระแสไฟฟ้าที่กำหนด: DC3.7V /≤ 200mA
• แรงดัน/กระแสไฟฟ้าในการชาร์จ: DC 5V/1250mA, เวลาในการชาร์จประมาณ 6 ชั่วโมง
• อายุการใช้งานแบตเตอรี่: ประมาณ 20 ชั่วโมง (เอฟเฟกต์แสงเริ่มต้น)/ประมาณ 333 ชั่วโมง (ปิดไฟทั้งหมด)

FR

Spécifications du produit

• Spécifications du Produit
• Touches: 81 touches
• Dimensions du produit: 329.5×136×44.3±0.2mm
• Poids du produit: Env. 1236g (sans fils)
• Tension/courant nominal: DC3.7V /≤ 200mA
• Tension/courant de charge: DC 5V/1250mA, charge env. 6 heures
• Autonomie de la batterie: env. 20 heures (effet d'éclairage par défaut)/env. 333 heures (toutes les lumières éteintes)

UKR

Специфікація продукту

• Характеристики продукту
• Клавіші: 81 клавіша
• Розміри продукту: 329.5×136×44.3±0.2мм
• Вага продукту: Прибл. 1236г (без дротів)
• Номінальна напруга/струм: DC3.7V /≤ 200мА
• Напруга/струм зарядки: DC 5V/1250мА, зарядка близько 6 годин
• Термін служби батареї: близько 20 годин (ефект освітлення за замовчуванням)/близько 333 годин (всі вогні вимкнені)

Indo

Spesifikasi Produk

• Spesifikasi Produk
• Tombol: 81 tombol
• Ukuran produk: 329.5×136×44.3±0.2mm
• Berat produk: Sekitar 1236g (tidak termasuk kabel)
• Tegangan/arus nominal: DC3.7V /≤ 200mA
• Tegangan/arus pengisian: DC 5V/1250mA, pengisian daya sekitar 6 jam
• Masa pakai baterai: sekitar 20 jam (efek cahaya default)/sekitar 333 jam (semua lampu mati)

TR

Ürün Özellikleri

• Ürün Özellikleri
• Tuşlar: 81 tuş
• Ürün boyutu: 329.5×136×44.3±0.2mm
• Ürün ağırlığı: Yakl. 1236g(kablolar hariç)
• Nominal voltaj/akım: DC3.7V /≤ 200mA
• Şarj voltajı/akımı: DC 5V/1250mA, şarj süresi yakl. 6 saat
• Pil ömrü: yakl. 20 saat(varsayılan ışık efekti)/yakl. 333 saat(tüm ışıklar kapalı)

JP

製品仕様

- 製品仕様
- キー数: 81キー
- 製品サイズ: 329.5×136×44.3±0.2mm
- 製品重量: 約1236g(ケーブル除く)
- 定格電圧/電流: DC3.7V /≤ 200mA
- 充電電圧/電流: DC 5V/1250mA、充電約6時間
- バッテリー寿命: 約20時間(デフォルト照明効果)/約333時間(照明完全オフ)

VN

Thông số kỹ thuật sản phẩm

- Thông số kỹ thuật sản phẩm
- Phím: 81 phím
- Kích thước sản phẩm: 329.5×136×44.3±0.2mm
- Trọng lượng sản phẩm: Khoảng 1236g(không bao gồm dây)
- Điện áp/dòng điện định mức: DC3.7V /≤ 200mA
- Điện áp/dòng điện sạc: DC 5V/1250mA, thời gian sạc khoảng 6 giờ
- Thời lượng pin: khoảng 20 giờ(hiệu ứng ánh sáng mặc định)/khoảng 333 giờ(tắt tất cả đèn)

leobog

Dongguan Suoai Electronics CO.,LTD

SOAI Industry Park,Huayu Street Changlong Village Huangjiang Town Dongguan City Guangdong Province

Execution Standard:GB/T 14081-2010

http://www.leobog.com/

Made in China

RoHS COMPLIANT

FR ÈTUI

FR Les piles et batteries se recyclent À DEPOSÉR EN MAGASIN OU À DEPOSÉR EN DÉCHETTERIE

Points de collecte sur www.quefairedemesdechets.fr

RECICLA Al Azul Envase Cartón Al Amarillo Envase Plastico